

STARLINE®**AL**

Technical data sheet for

AL

Premium Dishwasher

W 750mm x D 795mm x H 1530mm



With the fastest complete cycle time of 40 seconds, the AL delivers unrivalled single tank passthrough dishwasher performance and capacity, washing up to 1400 large plates per hour.

Standard Features

- High speed 40, 60 and 90 second cycles with large heating elements to ensure fast recovery for next cycle
- High efficiency 3 litres per cycle water consumption
- 430mm high wash chamber clearance
- Auto start on door closure
- Anti-drip door edge channels water away from operator
- Suits 500mm international standard racks
- Adjustable and removeable tilting rack slide
- Full length door springs allow fingertip lifting with tension of 2kg
- Stainless steel arms with removable end caps for cleaning
- Electromechanical controls
- 220mm leg clearance for cleaning beneath machine
- Corner or in-line installation
- Double filtration via scrap trays and separate wash inlet filter
- L-shaped tank with curved corners
- Robust stainless steel construction
- 1.5kW wash pump recirculates wash water at nominal 800 litres per minute through double upper and lower wash arms
- Fits 700mm deep bench for in-line installation - 750mm in corner application
- Insulated door option available on request
- Integral precision detergent dispensing pump
- Backflow prevention fitted




Accessories

- 2 x 500mm Dish Racks
- 1 x 500mm Cup Rack
- 1 x 8 Division Cutlery Basket
- 1 x Cutlery Container

Options

- Rinse Pump
- Drain Pump
- Rinse Aid Injector
- Fisher Pre-rinse gun or faucet
- Complete wash stations

STARLINE®
PROFESSIONAL WASH SYSTEMS

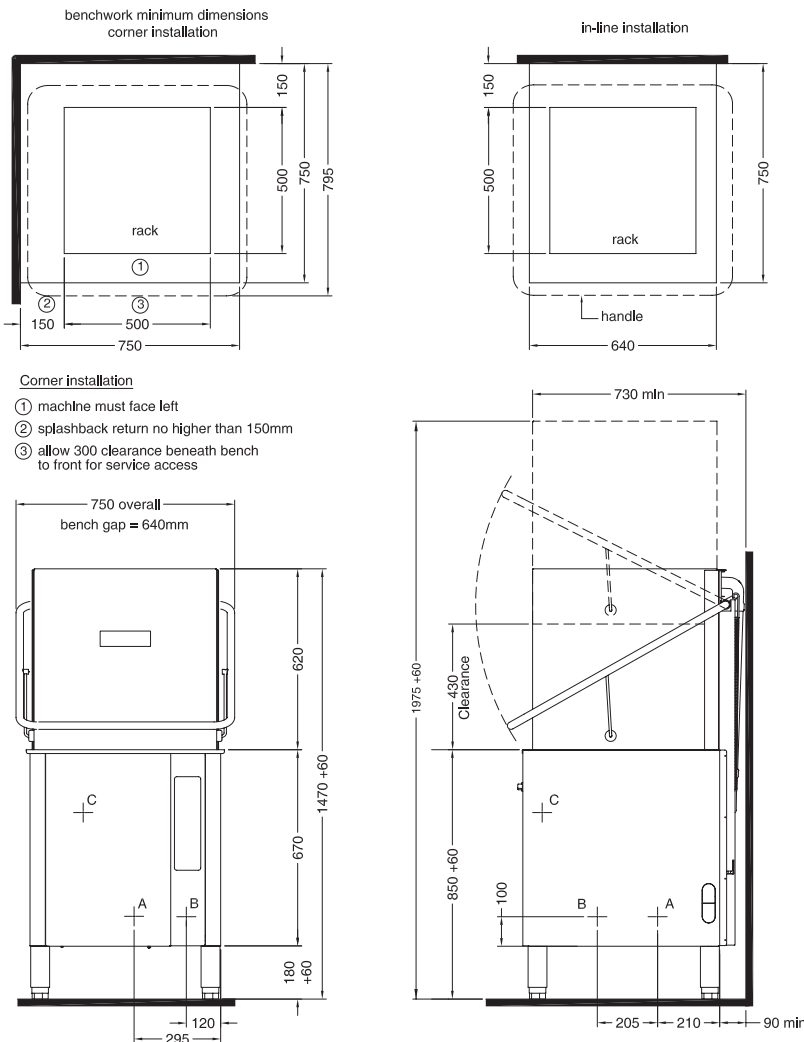

STARLINE®
PROFESSIONAL WASH SYSTEMS

Designed and manufactured by
WASHTECH®

ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



On call service where you are.
Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.
STARLINE SERVICE 09 829 0923

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

© Copyright Washtech 2011

A	Hot Water	temperature connection pressure flow quality backflow prevention	65C 1/2" 200-350 kPa 20 litres per min potable & soft atmospheric vacuum breaker
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	3 phase N+E 400V 50Hz	15A/phase, 9kW

Refer operator manual for complete installation instructions.

Dimensions

Width	750mm
Depth	795mm
Height	1530mm
Weight	120kg

Packed Dimensions

Width	800mm
Depth	950mm
Height	1475mm
Weight	141kg
Cubic metres	1.1m ³