

STARLINE®**GL**

Technical data sheet for

GL**Premium Glasswasher**

W 500mm x D 555mm x H 860mm



This high efficiency, high performance multi-cycle machine is suitable for busy bars and coffee shops.

Standard Features

- Unique OneTouch 1, 2 or 3 minute cycles with large 5kW rinse elements for fast recovery between cycles
- High efficiency 2.6 litres per cycle hot water consumption
- Powerful wash pump recirculates wash water at nominal 100 litres per minute
- 290mm wash chamber height clearance
- NZ standard 435mm x 435mm glass and dish racks
- Upper and lower wash - also suitable for coffee cups, saucers, lightly soiled dishes
- Upper and lower rinse
- Electromechanical controls
- Robust stainless construction
- Flush front
- Fits 600mm bench depth
- Removable rack slide
- 150mm legs supplied for easy cleaning underneath
- Integral precision detergent dispensing pump
- Backflow prevention fitted

Accessories


- 2 x 435mm Glass/Cup Rack
- 1 x Dish Holder
- 1 x Cutlery Container

Options

- Rinse Pump
- Drain Pump
- Rinse Aid Injector
- Fisher Pre-rinse gun or faucet
- Complete wash stations



STARLINE®
PROFESSIONAL WASH SYSTEMS

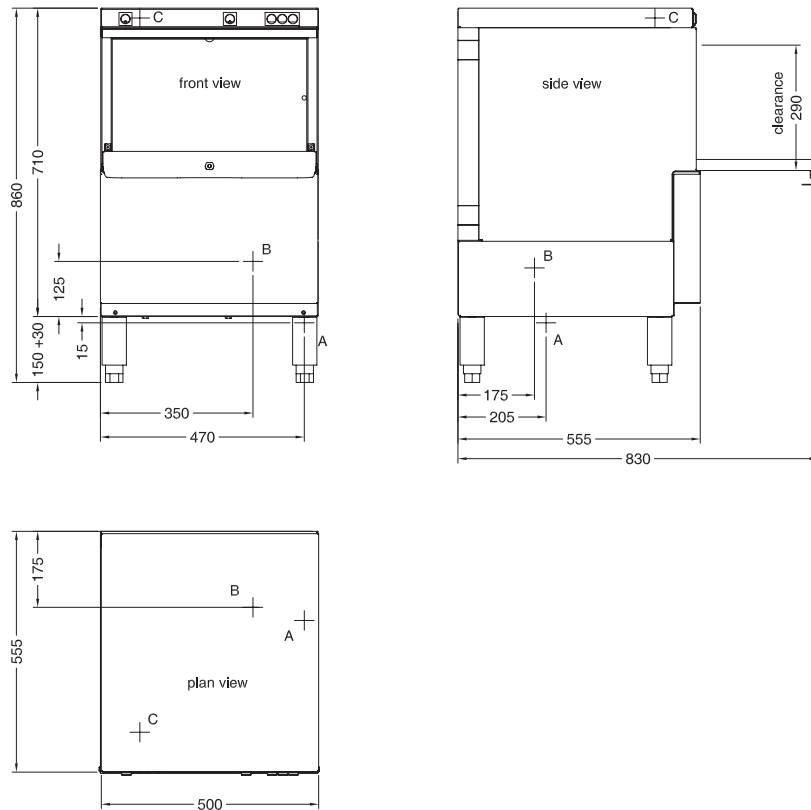

STARLINE®
PROFESSIONAL WASH SYSTEMS

Designed and manufactured by
WASHTECH®

ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



On call service where you are.
Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.
STARLINE SERVICE 09 829 0923

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

© Copyright Washtech 2011

| | | | |
|---|-------------------|---|---|
| A | Hot Water | temperature connection pressure flow quality backflow prevention | 65C 3/4" 200-350 kPa 20 litres per min potable & soft atmospheric vacuum breaker |
| B | Waste | connection line | 1.5 BSP 2" BSP |
| C | Electrical | single phase 230V 50Hz Reduced heating option | 22A, 4.7kW 12A, 2.4kW |

Refer operator manual for complete installation instructions.

| Dimensions | | Packed Dimensions | |
|------------|-------|-------------------|--------|
| Width | 500mm | Width | 590mm |
| Depth | 555mm | Depth | 650mm |
| Height | 860mm | Height | 870mm |
| Weight | 58kg | Weight | 74kg |
| | | Cubic metres | 0.35m³ |