

STARLINE®**UE**

Technical data sheet for

UE

Economy Dishwasher

W 600mm x D 650mm x H 850mm



Starline UE delivers no nonsense undercounter wash performance with 500mm racks.

Standard Features

- 2 minute wash cycle
- Low water consumption - less than 3 litres per cycle
- 300mm wash chamber height clearance
- Suits 500mm international racks
- Ergonomically positioned OneTouch controls
- Upper and lower stainless steel arms with removable caps for cleaning
- Flush front design
- Electromechanical controls
- Robust stainless steel construction
- Recirculates wash water at nominal 220 litres per minute
- 150mm legs to facilitate easy cleaning beneath machine
- Integral precision detergent dispensing pump
- Backflow prevention fitted
- Fits 700mm bench depth

Accessories


- 1 x 500mm Dish Rack
- 1 x 500mm Cup Rack
- 2 x Cutlery Containers

Options

- Rinse Pump
- Drain Pump
- Rinse Aid Injector
- Fisher Pre-rinse gun or faucet
- Complete wash stations



STARLINE®
PROFESSIONAL WASH SYSTEMS

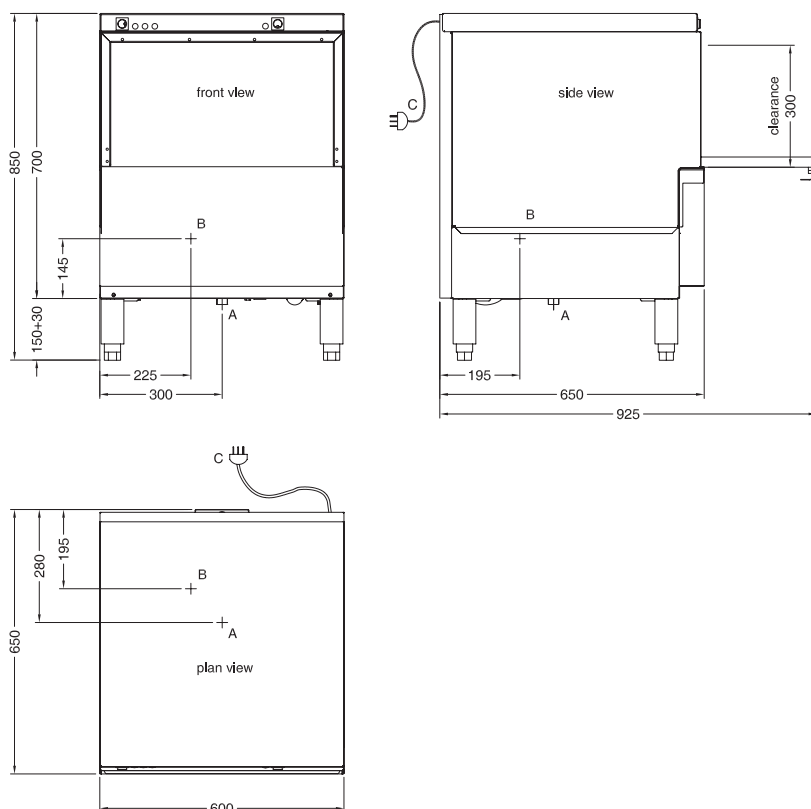

STARLINE®
PROFESSIONAL WASH SYSTEMS

Designed and manufactured by
WASHTECH®

ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



SERVICE & SUPPORT

On call service where you are.

Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.

STARLINE SERVICE 09 829 0923

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

© Copyright Washtech 2011

A	Hot Water	temperature connection pressure flow quality backflow prevention	65C 3/4" 200-350 kPa 20 litres per min potable & soft atmospheric vacuum breaker
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	single phase 230V 50Hz	15A, 3.2kW

Refer operator manual for complete installation instructions.

Dimensions

Width	600mm
Depth	650mm
Height	850mm
Weight	60kg

Packed Dimensions

Width	720mm
Depth	690mm
Height	850mm
Weight	77kg
Cubic metres	0.45m ³