

Technical data sheet for

CD200 4 Stage Conveyor Dishwasher


W 2700mm x D 765mm x H 1450mm

The CD200 is a fully automatic rack conveyor dishwasher with powerful prewash and wash zones plus ecorinse - now a triple final rinse system. The rinse economiser switch ensures that water is consumed only when racks are in the final rinse zone.

Standard Features

- Low water consumption - 300 litres per hour maximum
- Rinse economiser - machine uses water only when rack is in rinse zone
- 4 stage rack conveyor with powerful prewash and wash zones and ecorinse
- Triple final rinse
- Automatic tank fill and run-dry protection for incalloy heating elements
- Recirculated prewash
- Interlocked wash and rinse heating
- Low temperature deactivation to ensure hygiene and regulatory compliance
- Powerful drive with safety clutch and optional bench stop switch
- Safety stop switches to all doors
- Vent hoods fitted standard with duct connections, baffles and easy bench connection
- Full width, easily removable wash filter trays
- All stainless steel construction
- Simple electromechanical controls for ease of service
- Adjustable 200mm stainless legs
- Modular range includes options to allow installation in minimal area
- CAD design service for layout options
- Nationwide installation and after sales support
- 200 racks per hour standard setting - higher throughput on request to 240 racks per hour
- Numerous options and accessories for complete high volume wash systems



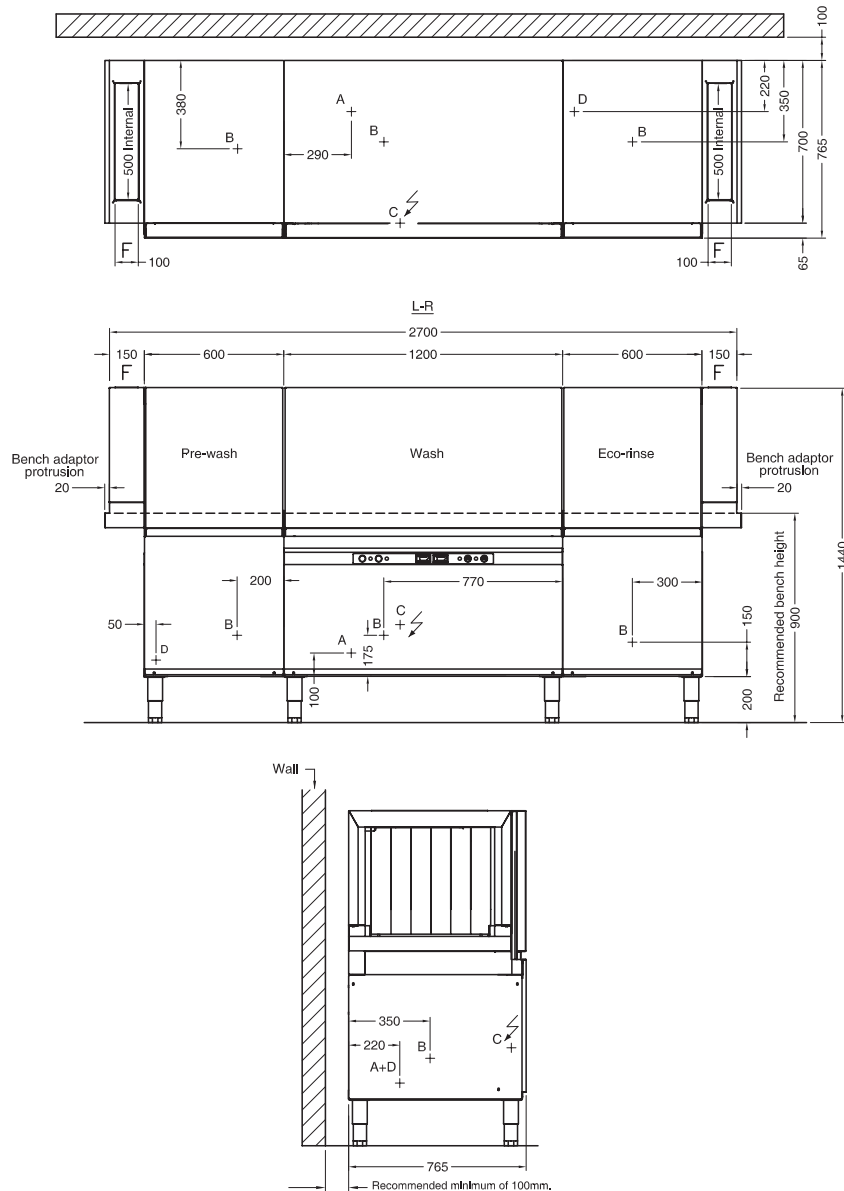

STARLINE®
PROFESSIONAL WASH SYSTEMS

Designed and manufactured by
WASHTECH®

ISO9001

All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



On call service where you are.

Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.

STARLINE SERVICE 09 829 0923

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

© Copyright Washtech 2011

A	Hot Water	temperature connection pressure flow quality	65C 3/4" 200-350 kPa 10 litres per min potable & soft
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	3 phase N+E 400V 50Hz	40A/phase, 25kW
D	Cold Water	Details as per (A)	
Refer operator manual for complete installation instructions.			

Dimensions

Width	2700mm
Depth	765mm
Height	1450mm
Weight	340kg

Packed Dimensions

Width	2905mm
Depth	875mm
Height	1510mm
Weight	440kg
Cubic metres	3.84m ³