

STARLINE®**M1**

Technical data sheet for

M1

Compact Dishwasher

W 630mm x D 650mm x H 1530mm



The popular choice in medium volume kitchens where space is limited. Suits economical 600mm bench depth for in-line or corner installation, now supplied with all-plastic 450mm racks.

Standard Features

- 2 minute cycle auto-starts on door closure
- High efficiency 3 litres per cycle water consumption
- 430mm high wash chamber clearance
- Auto start on door closure
- Anti-drip door edge channels water away from operator
- Adjustable and removeable tilting rack slide
- Full length door springs allow fingertip lifting with tension of 2kg
- Stainless steel arms with removable end caps for cleaning
- Electromechanical controls
- 220mm leg clearance for access beneath machines
- Corner or in-line installation
- Double filtration via scrap trays and separate wash inlet filter
- Robust stainless steel construction
- Powerful 370W wash pump recirculates wash water at nominal 220 litres per minute through upper and lower wash arms
- Fits 600mm deep bench for in-line installation - 650mm in corner application
- Integral precision detergent dispensing pump
- Backflow prevention fitted

Accessories


- 2 x 450mm Dish Rack
- 1 x 450mm Cup Rack
- 1 x Cutlery Container

Options

- Rinse Pump
- Drain Pump
- Rinse Aid Injector
- Fisher Pre-rinse gun or faucet
- Complete wash stations



STARLINE®
PROFESSIONAL WASH SYSTEMS

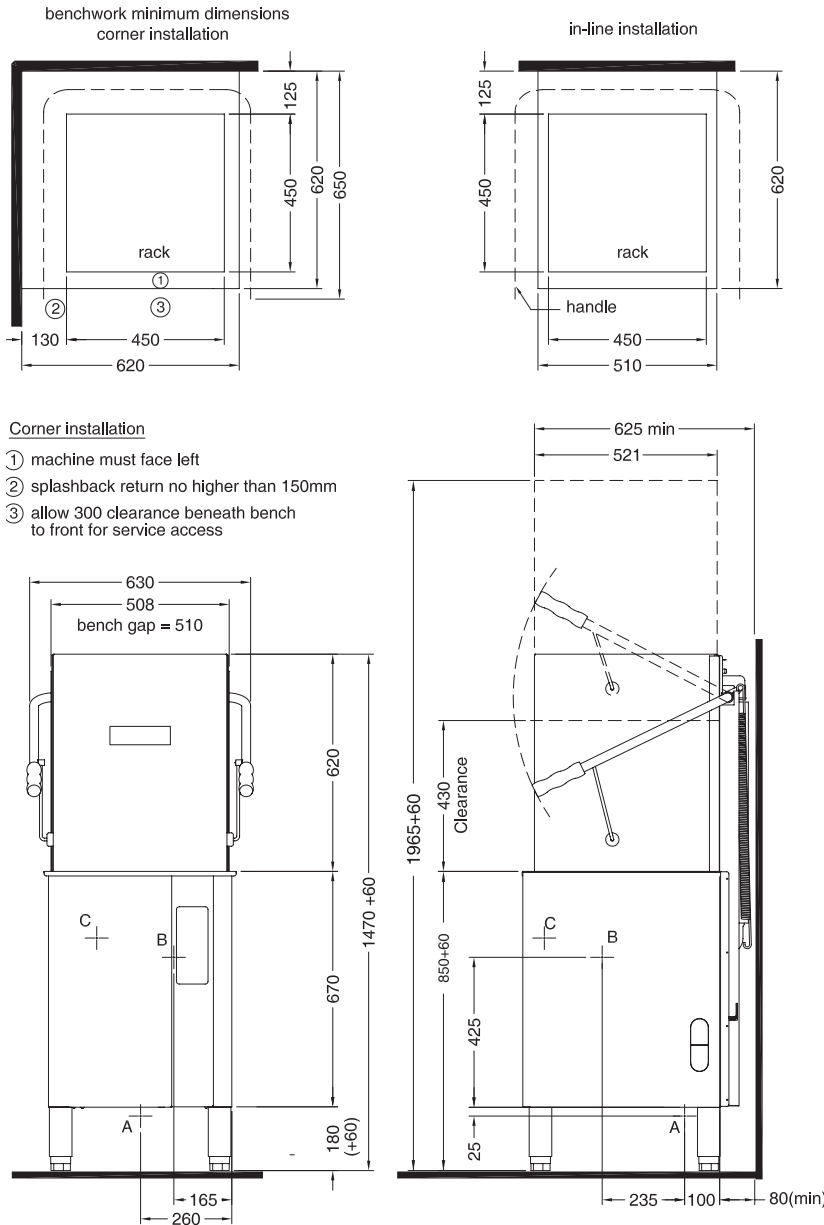

Corner installation

- ① machine must face left
- ② splashback return no higher than 150mm
- ③ allow 300 clearance beneath bench to front for service access

STARLINE®
PROFESSIONAL WASH SYSTEMS

Designed and manufactured by
WASHTECH®

ISO9001

All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



On call service where you are.
Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.
STARLINE SERVICE 09 829 0923

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

© Copyright Washtech 2011

| | | | |
|---|-------------------|---|---|
| A | Hot Water | temperature connection pressure flow quality backflow prevention | 65C 3/4" 200-350 kPa 20 litres per min potable & soft atmospheric vacuum breaker |
| B | Waste | connection line | 1.5 BSP 2" BSP |
| C | Electrical | single phase 230V 50Hz Reduced heating option | 22A, 5kW 12A, 2.7kW |

Refer operator manual for complete installation instructions.

Dimensions

| | |
|--------|--------|
| Width | 630mm |
| Depth | 650mm |
| Height | 1530mm |
| Weight | 80kg |

Packed Dimensions

| | |
|--------------|--------------------|
| Width | 695mm |
| Depth | 750mm |
| Height | 1440mm |
| Weight | 101kg |
| Cubic metres | 0.77m ³ |