

Technical data sheet for

PW3

Wide Body Passthrough Warewasher


1305mm x D 920mm x H 1755mm



The PW3 passthrough warewasher washes large objects such as crates, bins and bowls and sanitises with a high temperature final rinse. Usually installed into benches for easy pass-through operation with no lifting required.

Standard Features

- Twin large 1.5kW wash pumps recirculate wash water at nominal 1600 litres per minute for superior cleaning of heavily soiled items
- Triple cycle selection - 2, 4, and 6 minute cycles
- Powerful rinse booster elements ensure fast recovery between cycles
- 650mm high wash chamber clearance for tall items
- Large internal chamber with usable area 1050 x 640mm
- NEW low water consumption of only 4 litres of water per cycle
- Auto start on door closure
- Upper and lower stainless steel arms with removable end caps for cleaning
- Adjustable and removeable tilting rack slide
- Full access to wash chamber via 3 sided door
- FastClean - rounded wash tank, double filtration, scrap and pump inlet filters
- Robust stainless steel construction
- Electromechanical controls
- Counter-sprung easy action door lift
- 220mm stainless steel legs for access beneath machines
- Loads 2 x 500mm international racks
- Fits 850mm bench depth
- Rinse booster pump for optimal rinse quality
- Integral precision detergent dispensing pump
- Backflow prevention fitted
- Wash chamber




Accessories

- 1 x 500mm Dish Rack
- 1 x 500mm Cup Rack
- 1 x 8 Division Cutlery Container
- 1 x 435mm Cup Cover

Options

- Customised Wash Carriage
- Complete wash stations
- Fisher prerinse and tapware
- Custom racks for optimised loading

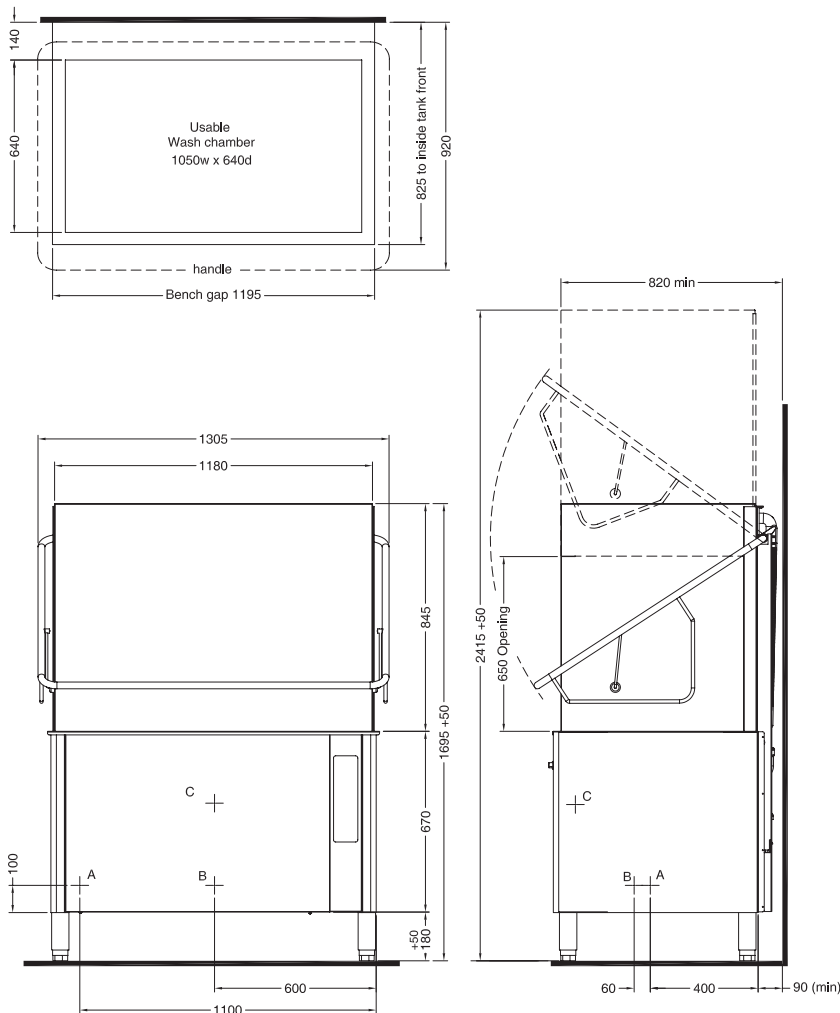

STARLINE®
PROFESSIONAL WASH SYSTEMS

Designed and manufactured by
WASHTECH®

ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



On call service where you are.
Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.
STARLINE SERVICE 09 829 0923

| | | | |
|---|-------------------|--|---|
| A | Hot Water | temperature connection pressure flow quality backflow prevention | 65C 1/2" 200-350 kPa 20 litres per min potable & soft atmospheric vacuum breaker |
| B | Waste | connection line | 1.5 BSP 2" BSP |
| C | Electrical | 3 phase N+E 400V 50Hz | 30A/phase, 18kW |

Refer operator manual for complete installation instructions.

| Dimensions | | Packed Dimensions | |
|------------|--------|-------------------|--------|
| Width | 1305mm | Width | 1450mm |
| Depth | 920mm | Depth | 1050mm |
| Height | 1755mm | Height | 1770mm |
| Weight | 220kg | Weight | 276kg |
| | | Cubic metres | 2.63m³ |

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

© Copyright Washtech 2011